

# Storage water heater 15 litres S15-O



Телефон: +7 (495) 215-29-17  
E-mail: [info@vodonagrevateli24.ru](mailto:info@vodonagrevateli24.ru)  
Website: <https://vodonagrevateli24.ru>

## Application areas

Single or multiple point supply:

- > Disposal sink
- > Washbasin
- > Kitchen sink
- > Shower



# Storage water heater 15 litres

## S15-O

### Product information



Energy efficiency class **B** S15-O (oversink model)

Part number:	4100-41153
Content [litres]:	15
Type; maximum operating pressure [MPa (bar)]:	unvented <sup>1)</sup> ; 0.8 (8)
Water connections (thread connections):	G ½"
Temperature range [°C]:	5 °C (※) / 30 °C – 35 °C (ECO) / 55 °C / 80 °C (MAX)
approx. mixed water amount 40 °C <sup>2)</sup> [litres]:	24
Nominal power rating (kW):	2.2
Voltage supply [V]:	1~ / N / PE 230 V AC
Nominal current [A]:	10
Heating time $\Delta t = 55 K$ <sup>3)</sup> [min]:	26
Standby power consumption at 65 °C [kWh / 24h]:	0.49
Internal tank:	copper
Function indicator:	✓
Protection class:	IP 24
Dimensions (height × width × depth) [cm]:	45.2 × 30.0 × 28.5
Power cable:	with plug
approx. weight filled with water [kg]:	22.5

1) Optional installation with open-outlet tap 2) At a cold water temperature of 15 °C and a storage content temperature of 55 °C 3) Temperature increase e.g. from 15 °C to 70 °C

#### Description

- > Unvented 15-litre storage water heater (oversink model) for hot water supply at one or two points-of-use
- > Corrosion-proof and therefore maintenance-free internal copper tank
- > High-quality insulation keeps heat losses at a minimum
- > Temperature control approx. 5 °C to 80 °C
- > For vented installation (with open-outlet tap) and unvented installation (with safety assembly)
- > Automatic frost protection
- > Power cable with plug (~110 cm)


# Storage water heater 15 litres S15-O Installation



Example of an **open-outlet** installation with open-outlet tap SNO.

Measurements in mm

Assembly and operating instructions must be observed upon installation.

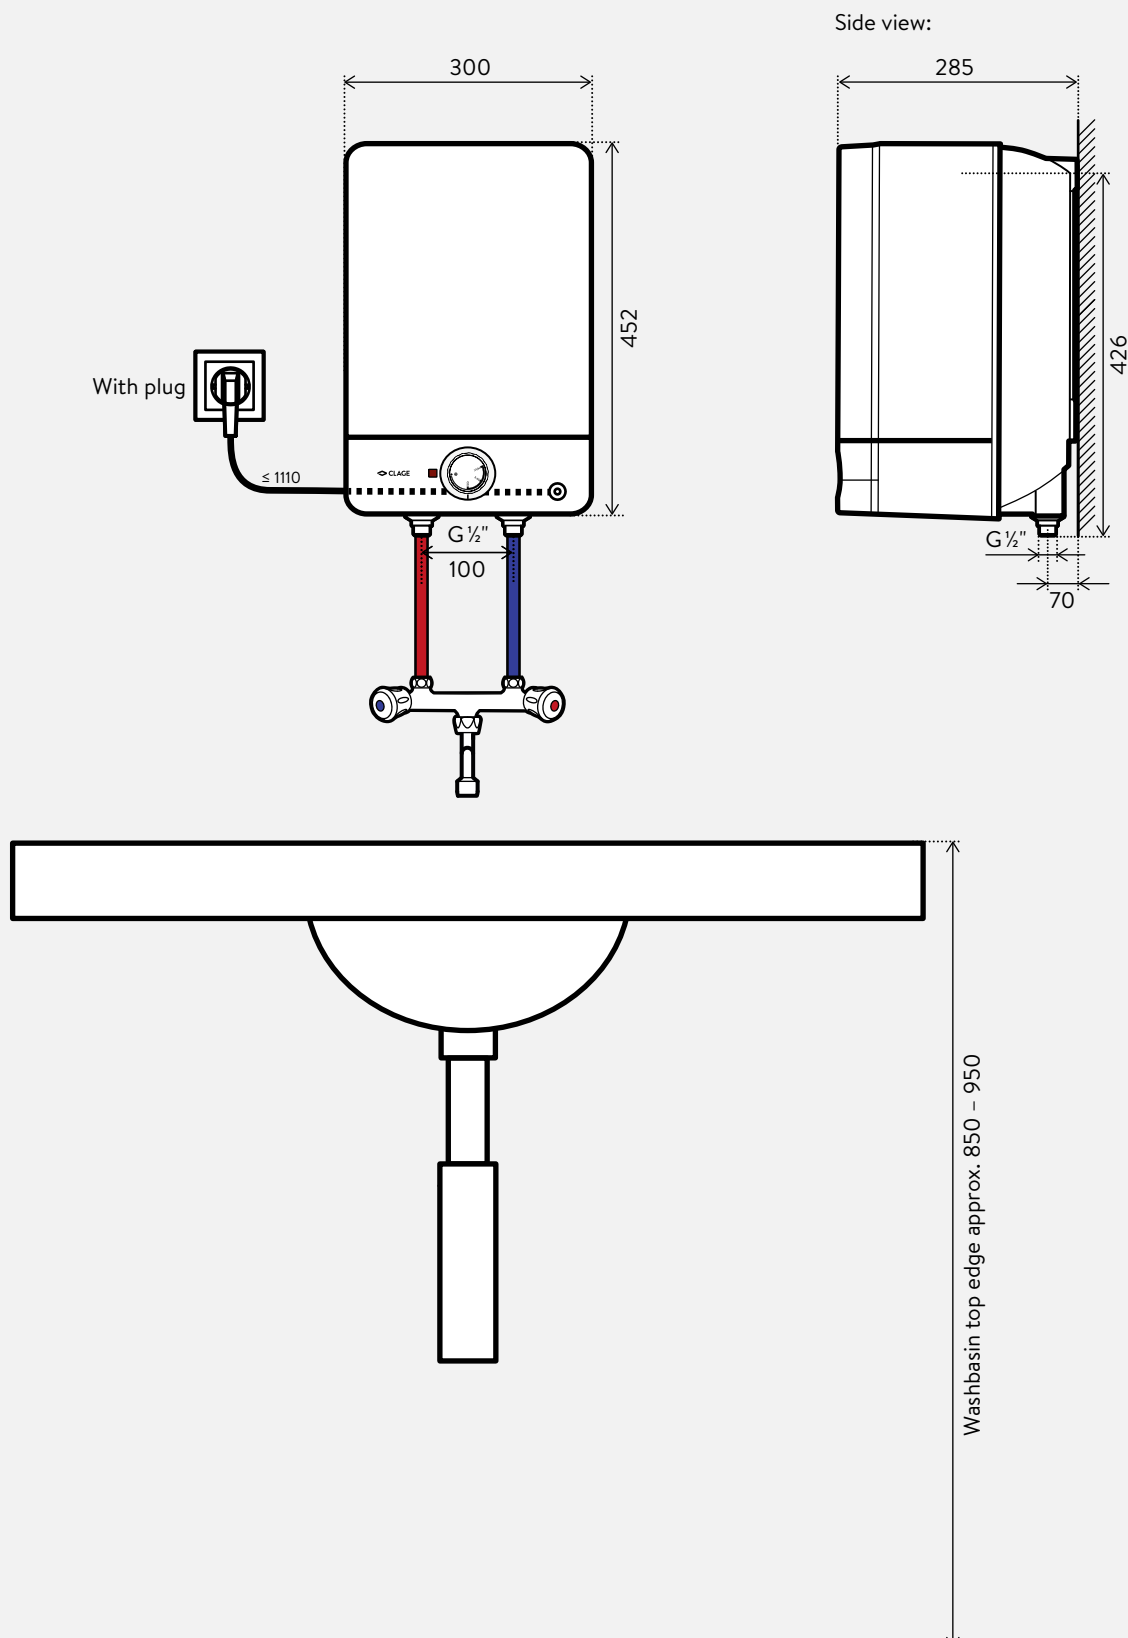

Storage water heater 15 litres  
**S15-O**  
Accessories

---



**SG** (optional)

Oversink safety assembly (6 bar) for closed outlet installation

**SG:** Part no. 4100-0011



**SGM** (optional)

Oversink safety assembly (6 bar) for closed outlet installation  
with pressure-reducing valve up to 10 bar

**SGM:** Part no. 4100-0012

Storage water heater 15 litres  
**S15-O**  
Accessories



**Accessory recommendation for disposal sink** (optional)

**SEO** (open-outlet)

Single-lever oversink mixer tap with swivel spout 20 cm

**SEO:** Part no. 4100-0115



**Accessory recommendation for disposal sink** (optional)

**SNO** (open-outlet)

Wall-mounted mixer tap with combination valve and swivel spout 16 cm

**SNO:** Part no. 4100-0110



**Aerators** (optional)

Aerator insert for tap adapter M22/24 at the tap

**CSS:** Part no. 0010-00504



Aerator with chrome tap adapter M22i  
(suitable for taps with male threads at the outlet)

**CSSi:** Part no. 89125